

UNCLASSIFIED

AD 401 409

*Reproduced
by the*

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD 401 409

TECHNICAL MEMORANDUM

(TM Series)

ASTIA AVAILABILITY NOTICE

Qualified requesters may obtain copies of this report from ASTIA.

This document was produced by SDC in performance of contract AF 19(628)-1648, Space Systems Division Program, for Space Systems Division, AFSC.

Indian Ocean Station Buffer	SYSTEM
Milestone 3	DEVELOPMENT
by	CORPORATION
D. A. Biggar	2500 COLORADO AVE.
7 March 1963	SANTA MONICA
Approved	CALIFORNIA
T. W. Polk	

The views, conclusions or recommendations expressed in this document do not necessarily reflect the official views or policies of agencies of the United States Government.

Permission to quote from this document or to reproduce it, wholly or in part, should be obtained in advance from the System Development Corporation.

Although this document contains no classified information it has not been cleared for open publication by the Department of Defense. Open publication, wholly or in part, is prohibited without the prior approval of the System Development Corporation.



7 March 1963

1

TM(L)-1079

1.0 Purpose.

This document describes program requirements for the Indian Ocean Station Buffer, a 160-A program system designed for use at the Satellite Control Facility. A general description of the programs, their interfaces, and scheduling are given. This document should be construed as a proposal subject to review before implementation proceeds.

2.0 General Discussion.

The Indian Ocean Station Buffer is designed to meet the peculiar communication problem between the STC and the Indian Ocean Station (hereafter IOS). All transmission will be over two fully-duplicated, 100 wpm teletype lines between the two facilities. The major design restrictions placed upon this program system are as follows:

- a. No special hardware will be included in the proposal. All communications will be handled by punched paper tape input to the teletype equipment.
- b. Data processing rates will be restricted to the transmission speed of the lines. While computer processing capability exceeds teletype line capacity, the amount of data punched at IOS should not result in excessive delay at the STC.
- c. Prepass data of all appropriate varieties will be sent from the STC to IOS to support all vehicles.
- d. Tracking data will be received from IOS and will be input directly to the 1604 through the use of STAPIN (Tracking Input Subroutine for Augmented 1604 Programs). All vehicles may be thusly supported.
- e. Command status information from the T&C Computer will be received from IOS by manual teletype procedures without computer processing at the STC.
- f. Telemetry data will be received from IOS and processed by the Bird Buffer Telemetry Module for display at the remote printers for Program 823 only.
- g. Scheduling and usage of this program will be constrained by design restrictions implicit in the Augmented Satellite Control Facility System.
- h. The basic message formats and data order between the Bird Buffer and Tracking Station will be used without modification.

3.0 Data Flow.

Figure 1 shows the data flow between the STC and IOS.

4.0 Program Descriptions.

This section lists modifications to existing functions and new programs.

4.1 IOSB

The Indian Ocean Station Buffer is made up of major components of the Bird Buffer System and two new programs to punch and verify paper tape. All messages referred to in this document are in the formats described in TM(L)-834/000/01A, Bird Buffer Combined Milestone 3-4, 14 February 1963.

4.1.1 Punch Paper Tape Module (SPUN).

Paper tape will be punched containing all prepass messages normally transmitted to a tracking station. This module will be capable of the following functions:

a. Providing visual header on paper tape giving vehicle number, rev. no., date, and system time of initial pointing data, and destination computer. This header will be used to file paper tape and will be transmitted to IOS.

b. Converting messages from 12-bit 160-A words to 5-bit paper tape codes. (See Appendix I for detailed examples of paper tape format.) Each 12-bit word will be divided into three 4-bit words. A parity bit will be added to each 4-bit word for verification.

c. Punching 5-level paper tape with spacing between messages.

d. Recognizing command messages and providing for punching commands twice.

e. As an option, writing a magnetic tape for conversion to paper tape on an off-line 160-A computer.

f. The module will be called by SPREP to punch paper tape.

7 March 1963

3
(page 4 blank)

TM(L)-1079

1

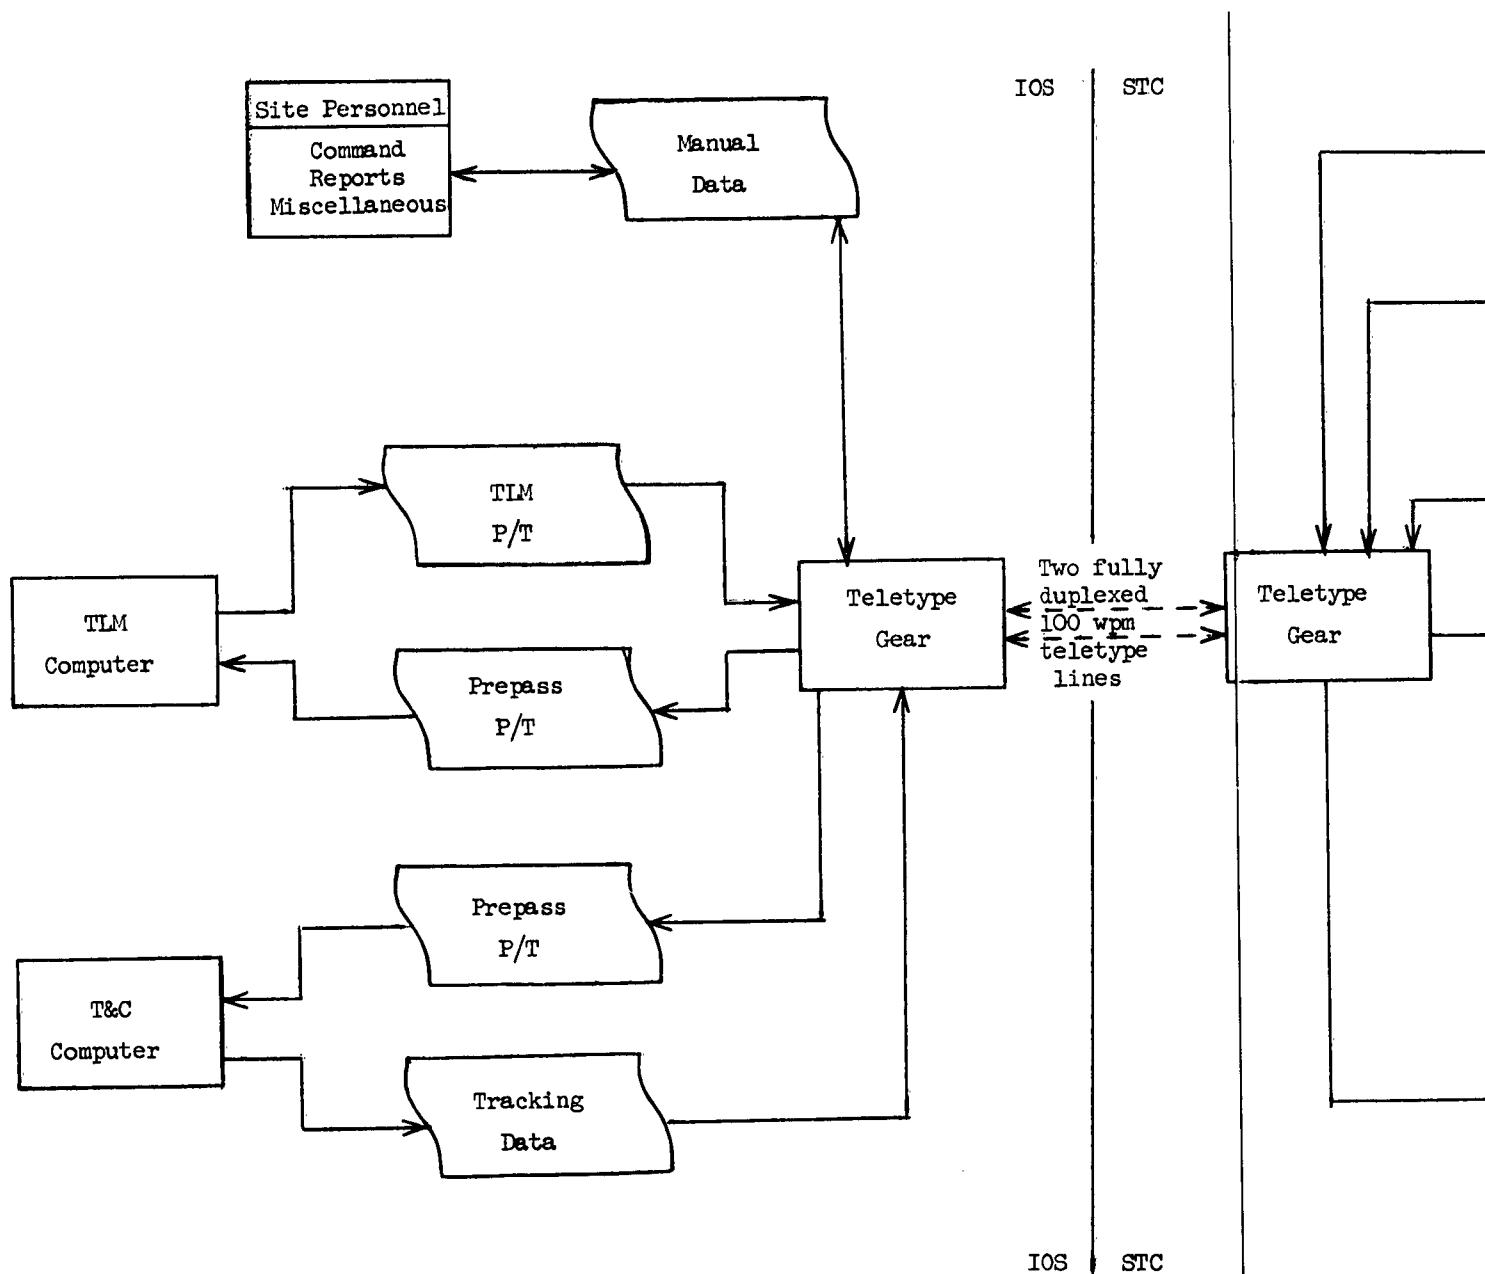


FIGURE 1

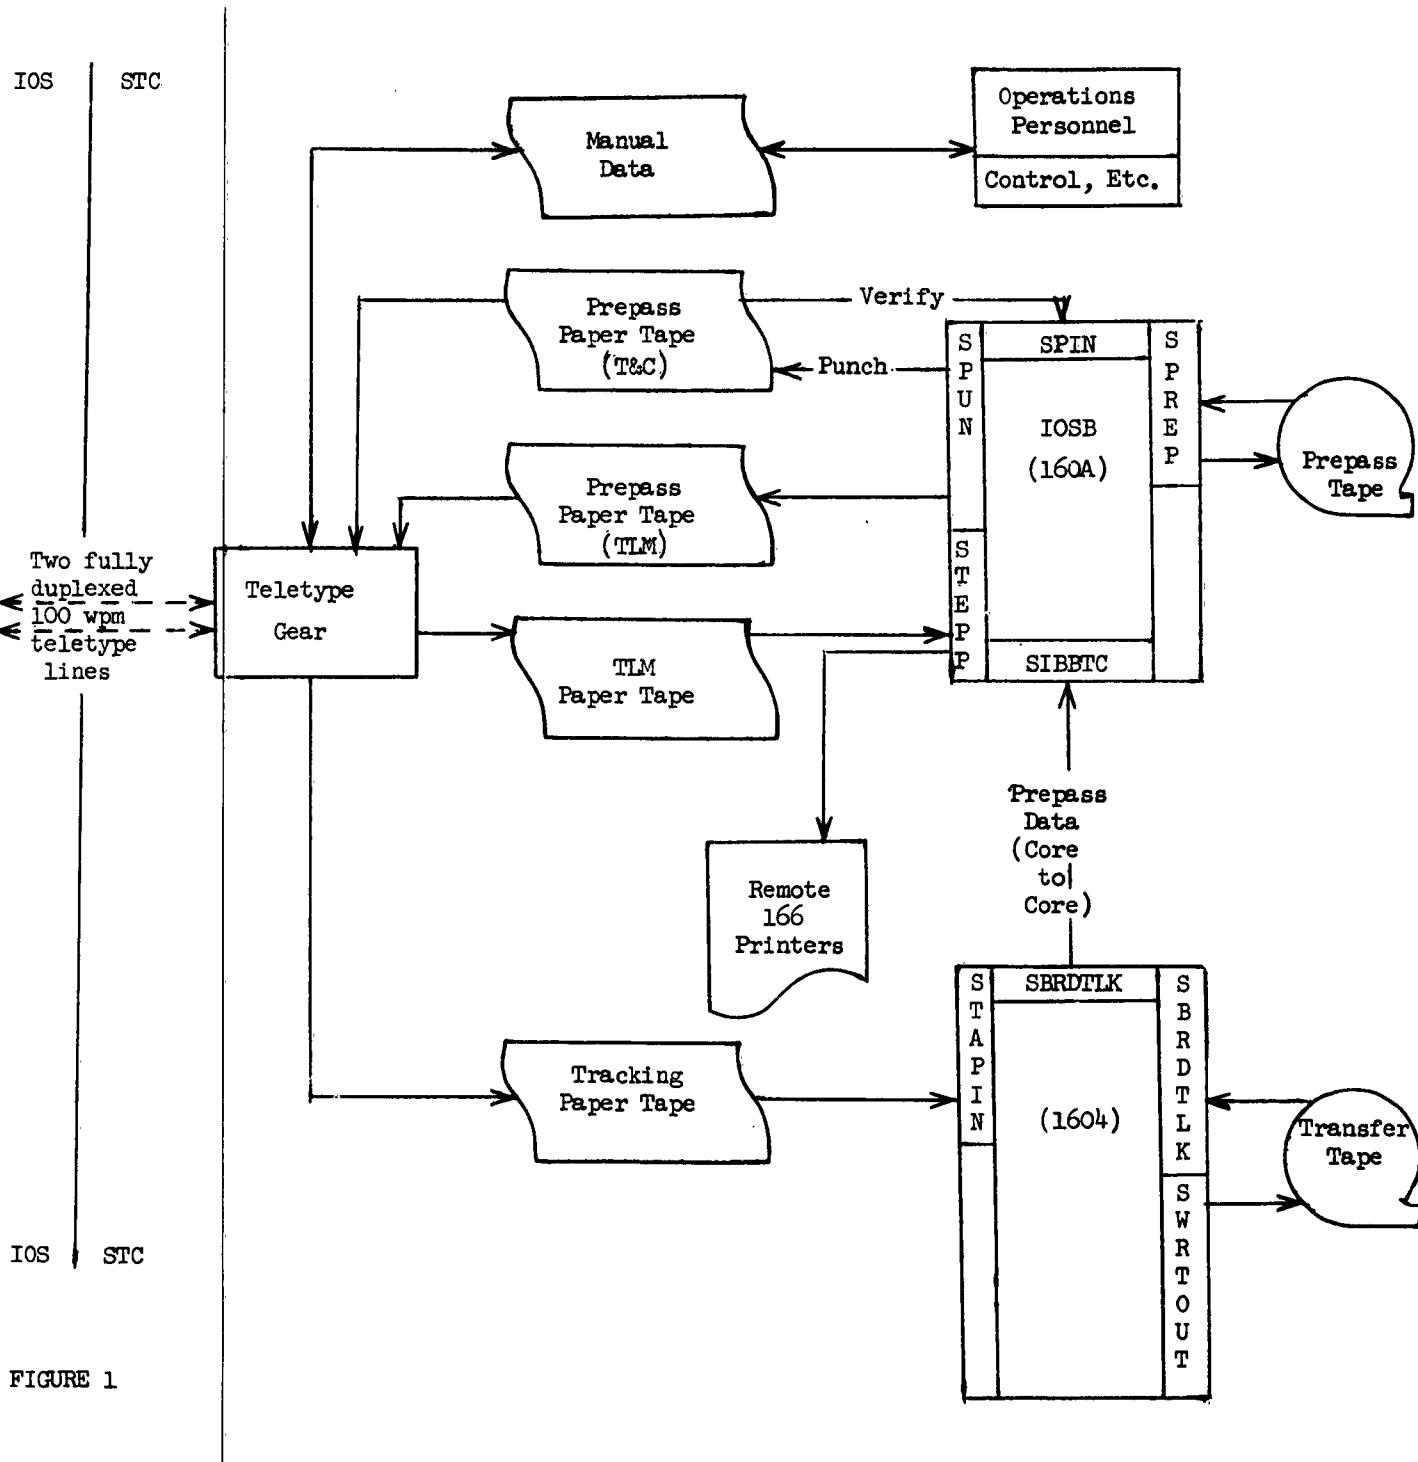


FIGURE 1

4.1.2 Verify Paper Tape Module (SPIN).

Paper tape punched by SPUN may be verified by the IOSB by calling SPIN. SPIN will be under the control of the executive module, SXCON. SPIN will be capable of the following functions:

- a. Reading one or several passes worth of prepass paper tape.
- b. Logging tape contents and error conditions.
- c. Doing parity and checksum computations on all messages.
- d. Comparing bit-for-bit successive command messages on the paper tape.

4.1.3 Executive Module (SXCON).

The executive module of the Bird Buffer System will be modified to allow punching and verification of paper tape and processing of telemetry paper tape for display at the remote printers. All those functions related to real-time contact with tracking stations and recording of pass data will be deleted to make space for new and amended modules. The Bird Buffer/1604 interface will remain intact (See TM(L)-834/000/01A, pp. 4, 62-65 for detailed description of this module). The major features of the non-station-contact mode of operation will be used for all new functions.

4.1.4 Input Processing Module (SPROC).

The input processing module will be modified to delete unwanted functions and add new functions. The following functions described in TM(L)-834/000/01A pp. 66-69 will be included in the IOSB.

- a. **00 Initialize.
- b. **02 Transfer Prepass.
- c. **04 Merge Tape.
- d. **06 Send Prepass (Modified to use paper tape and specify destination computer).
- e. **07 Transfer Card Prepass.
- f. **24 Send Text (STC Printers only).
- g. **99 End.

New functions will be added as follows:

- a. **25 Verify Paper Tape.
- b. **26 Read Telemetry Paper Tape.

Function Card formats will be consistent with existing Bird Buffer card formats.

4.1.5 Prepass Module (SPREP).

The prepass module will require minor modifications to allow the calling of SPUN to punch prepass data instead of using the 1200-bit line.

4.1.6 Communications Module (SIBETC).

The 1604/Bird Buffer functions will be used intact.

4.1.7 Telemetry Processing Module (STEPP).

The telemetry processing module, modified to support program 823 (823-specific features are neither listed nor costed in this document), will be used to provide telemetry displays at the remote 166 printers. Small modifications to printer timing will be necessary because time sequencing is not driven by "real-time" messages from IOS.

4.1.8 Utility and Control

All utility programs provided for the Bird Buffer System to assemble programs, load and correct master tapes, make up symbol tables, and bootstrap the system master tape will be used without modification. The operation of the IOSB will be exactly like the Bird Buffer in all common functions.

7 March 1963

7

TM(L)-1079

APPENDIX I

Sample Paper Tape Formats

H ₁₁	H ₇	H ₃	S ₅	S ₁	A ₃	M ₁₁	M ₇	M ₃	C ₁₁	C ₇	C ₃
H ₁₀	H ₆	H ₂	S ₄	S ₀	A ₂	M ₁₀	M ₆	M ₂	C ₁₀	C ₆	C ₂
-	-	-	-	-	-	-	-	-	-	-	-
H ₉	H ₅	H ₁	S ₃	A ₅	A ₁	M ₉	M ₅	M ₁	C ₉	C ₅	C ₁
H ₈	H ₄	H ₀	S ₂	A ₄	A ₀	M ₈	M ₄	M ₀	C ₈	C ₄	C ₀
P	P	P	P	P	P	P	P	P	P	P	P

H₁₁ - H₀ = New Message Header (all 1's).

S₅ - S₀ = Station Number.

A₅ - A₀ = Message Code (001010 = 12).

M₁₁ - M₀ = Telemetry Mode.

C₁₁ - C₀ = Arithmetic Complement Checksum of the header message.

P's = Parity (odd).

Telemetry Report Header Message

7 March 1963

TM(L)-1079

H ₁₁	H ₇	H ₃	S ₅	S ₁	A ₃	M ₁₁	M ₇	M ₃	B ₁₁	B ₇	T ₁₄	B	T ₇	T ₃	N N---C ₁₁	D ₇	D ₃	I ₁₁	I ₇	I ₃	E...K ₁₁	K ₇	K ₃
H ₁₀	H ₆	H ₂	S ₄	S ₀	A ₂	M ₁₀	M ₆	M ₂	B ₁₀	B ₆	T ₁₃	T ₁₀	T ₆	T ₂	N N---B	D ₆	D ₂	I ₁₀	I ₆	I ₂	E...K ₁₀	K ₆	K ₂
H ₉	H ₅	H ₁	S ₃	A ₅	A ₁	M ₉	M ₅	M ₁	B ₉	T ₁₆	T ₁₂	T ₉	T ₅	T ₁	N N---D ₉	D ₅	D ₁	I ₉	I ₅	I ₁	E...K ₉	K ₅	K ₁
H ₈	H ₄	H ₀	S ₂	A ₄	A ₀	M ₈	M ₄	M ₀	B ₈	T ₁₅	T ₁₁	T ₈	T ₄	T ₀	N N---D ₈	D ₄	D ₀	I ₈	I ₄	I ₀	E...K ₈	K ₄	K ₀
P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P P---P	P	P	P	P	P	P...P	P	P

H₁₁ - H₀ = New Message Header (all 1's).

S₅ - S₀ = Station Number.

A₅ - A₀ = Message Code (001011 = 13).

M₁₁ - M₀ = Telemetry Mode.

B₁₁ = 1 if message contains "Event" only.

= 0 if fixed format words in message.

B₁₀ - B₀ = Blanks (zeros).

T₁₆ - T₁₁ = 6 most significant bits of system time, in seconds.

T₁₀ - T₀ = 11 least significant bits of system time, in seconds.

N = Fixed Format telemetry items.

C₁₁ = 1 } Ident bits of "Event" associated system times.
C₁₀ = 0 }

D₉ - D₀ = 10 least significant bits of associated system time if C₁₁ = 1, ident otherwise.

I₁₁ - I₉ = 0 (ident bits of Event Identifications).

I₈ - I₀ = Identification number of event telemetry item.

E's = Event value.

K₁₁ - K₀ = Arithmetic Complement Checksum for one message.

P's = Parity (odd).

Telemetry Report Message

7 March 1963

TM(L)-1079

9

(last page)

K ₁₁	K ₇	K ₃	-H ₁₁	H ₇	H ₃	S ₅	S ₁	A ₃	R ₁₁	R ₇	R ₃	F ₁₁	F ₇	F ₃
K ₁₀	K ₆	K ₂	(15 blanks)	-H ₁₀	H ₆	H ₂	S ₀	A ₂	R ₁₀	R ₆	R ₂	F ₁₀	F ₆	F ₂
K ₉	K ₅	K ₁	-H ₉	H ₅	H ₁	S ₃	A ₅	A ₁	R ₉	R ₅	R ₁	F ₉	F ₅	F ₁
K ₈	K ₄	K ₀	-H ₈	H ₄	H ₀	S ₂	A ₄	A ₀	R ₈	R ₄	R ₀	F ₈	F ₄	F ₀
P	P	P	-P	P	P	P	P	P	P	P	P	P	P	P

K₁₁ - K₀ = Last message Arithmetic Complement Checksum.

H₁₁ - H₀ = New Message Header. (7777)

S₅ - S₀ ≈ Station Number.

A₅ - A₀ = Message Code (010000 = 20)

R₁₁ - R₀ ≈ Fade Message Ident (01000000011 = 2003).

F₁₁ - F₀ ≈ Fade Message Arithmetic Complement Checksum.

P's = Parity (odd).

7 March 1963

TM(L)-1079

External Distribution List

Space Systems Division
(Contracting Agency)

Maj. C. R. Bond (SSOCD)
Maj. N. D. LaVally (SSOX)

6594th Aerospace Test Wing
(Contracting Agency)

Lt. Col. A. W. Dill (TWRD)
Lt. Col. M. S. McDowell (TWRU)
TWACS

PIR-E1 (Lockheed)

J. A. Boysen
N. N. Epstein
W. E. Moorman
G. F. Taylor
R. L. Vader
P. E. Williams

PIR-E2 (Philco)

J. A. Bean
J. A. Isaacs
R. Morrison
S. M. Stanley

PIR-E3 (LFE)

D. F. Criley
K. B. Williams

PIR-E4 (GE-Santa Clara)

D. Alexander

PIR-E4 (GE-Sunnyvale)

J. Farrentine
N. Kirby

PIR-E4 (GE-Box 8555)

J. S. Brainard
R. J. Katucki
J. D. Selby

PIR-E4 (GE-Box 3198 Chestnut)

J. F. Butler
C. A. Cummings
H. D. Gilman

PIR-E4 (GE-Bethesda)

A. Pacchiali

PIR-E4 (GE-Box 8661)

F. T. Clark
J. D. Rogers
W. R. Weinrich

PIR-E5 (Aerospace)

M. Ackerman
F. M. Adair
A. Bakst
J. W. Bengston
R. V. Bigelow
R. O. Brandsberg
L. H. Garcia
G. J. Hansen
L. J. Kreisberg
M. L. Luther
R. E. Olsen
T. R. Parkin
E. E. Retzlaff
H. M. Reynolds
D. Saadeh
C. H. Shorter
R. G. Stephenson
D. D. Stevenson
V. White

PIR-E7 (STL)

A. J. Carlson

(3)

PIR-E8 (Mellonics)

F. Druding

(3)

(32)

(3)

7 March 1963

TM(L)-1079

Internal Distribution List

D. Allfree	22078	R. Keyes	20073
J. Aldana	24113	J. Kneemeyer	24065
B. Alexander	22083	R. Knight	24110
N. Alperin	24118	R. W. Knight	22095
E. Armstrong	24089	L. Kolbo	24139
C. Becerra	24082	L. Laughlin	20073
D. Biggar	24090	J. LaVine	20079
R. Bilek	24124	H. Lewis	24117
L. Brenton	22070	J. Little	20077
B. Burke	23014	F. Long	24122
R. Burke	23014	J. Lytton	24077
C. Bustya	22084	G. Madrid	24049
M. Champaign	24127	G. Mahon	22076
D. Chesler	22087	R. Marshall	24117
C. Chiodini	22078	J. Marioni	24076
B. Ciaccia	24082	W. Martin	24089
R. Clements	24132	J. McKeown	24121
B. Cline	24097	J. Milanese	24121
J. Cogley	24135	J. Munson	24048
L. Conger	22079	G. Myers	14056
P. Cooley	24083	P. Nelson	24075
D. Crum	24093	L. Ngou	25030
L. DeCuir	22096	M. Olson	24124
W. Derango	24082	L. Padgett	24085
G. Dexter	24128	E. Patin	Sunnyvale
R. Disse	24139	D. Persico	20076
G. Dobbs	24094	T. Polk	24103
W. Dobrusky	22125	D. Reilly	24085
R. Dugas	24105	M. Rockwell	22070
R. Ellis	24081	C. Seacat	Sunnyvale
R. Erickson	24110	H. Seiden	22091
H. Feldstein	27013	R. Scott	24093
C. Francis	20075	R. Shapiro	25036
M. Franks	25030	S. Shoel	24123
L. Friedman	22083	R. Skelton	24127
S. Gardner	22053	N. Speer	20079
V. Gergen	24109	E. Stone	22116
I. Greenwald	24058	M. Sweeney	24057
J. Haake	24120	W. Taber	22053
D. Henley	24058	T. Tennant	27024
C. Hill	24057	J. Thompson	22077
J. Hillhouse	24049	C. Toche	24088
H. Holzman	22096	R. Totschek	24090
G. Hudson	22101	A. Tucker	24115
R. Johnson	24105	A. Vorhaus	24076
P. Kastama	24053	S. Weems	24126
M. Katz	24103	G. West	Sunnyvale
F. Kayser	25026	G. P. West	24094
J. Keddy	25026	M. Weinstock	22095
D. Key	24123	B. Williams	24091

7 March 1963

TM(L)-1079

G. Wilson	22101
M. Winsor	24137
J. Winter	24097
R. Wise	24051
J. Wong	Sunnyvale
A. Robinson	27013
J. Schroeder	27011

UNCLASSIFIED

System Development Corporation,
Santa Monica, California.

INDIAN OCEAN STATION BUFFER

MILESTONE 3

Scientific rept., TM(L)-1C79,
by D. A. Biggar. 7 March 1963,

9p., 1 fig.

(Contract AF 19(628)-14448, Space
Systems Division Program, for Space
Systems Division, AFSC)

Unclassified report

DESCRIPTORS: Programming (Computers).
Satellite Networks.

Describes program requirements for the
Indian Ocean Station Buffer, a 160-A

UNCLASSIFIED

UNCLASSIFIED

program system designed for use at
the Satellite Control Facility.
Gives a general description of the
programs, their interfaces, and
scheduling.

UNCLASSIFIED